


RED LED mounts on 48v switch top 2 legs with Anode (long leg) on the leg closest to PCB edge.

RP = Resistor to set PAD attenuate level
 RL = Resistor load for input transformer secondary loading
 CL = Capacitor load for input transformer secondary loading
 RZ = Resistor part of zobel load for input transformer secondary loading
 CZ = Capacitor part of zobel load for input transformer secondary loading
 RG = Sets maximum gain of mic pre amp

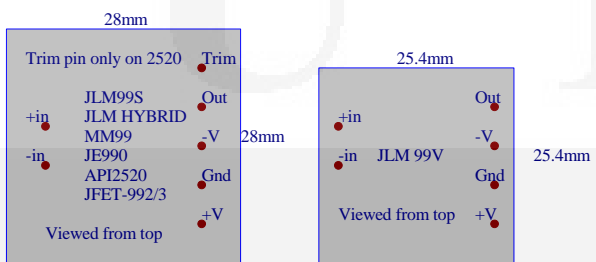

www.jlmaudio.com

Title		
Baby Animal Mic Pre PCB with JLM14 & OPA2604		
Size	Number	Revision
A4		A
Date:	9-Apr-2006	Sheet of 1
File:	Drawn By: Joe Malone	